



Constructora Española de Maquinaria, S.A.

Renom


C.I.F. A-08-047.300

Ctra de Ribes, 50 – 08591 AIGUAFREDA (Barcelona)

Apdo. 1255 – Tef +34 93 844 00 00 y +34 93 844 22 44 – Fax: +34 93 844 21 12

<http://www.cemsa-renom.com> e-mail: info@cemsa-renom.com

ACOPLAMIENTO ELÁSTICO POR RESORTES SERIE “AR-8”

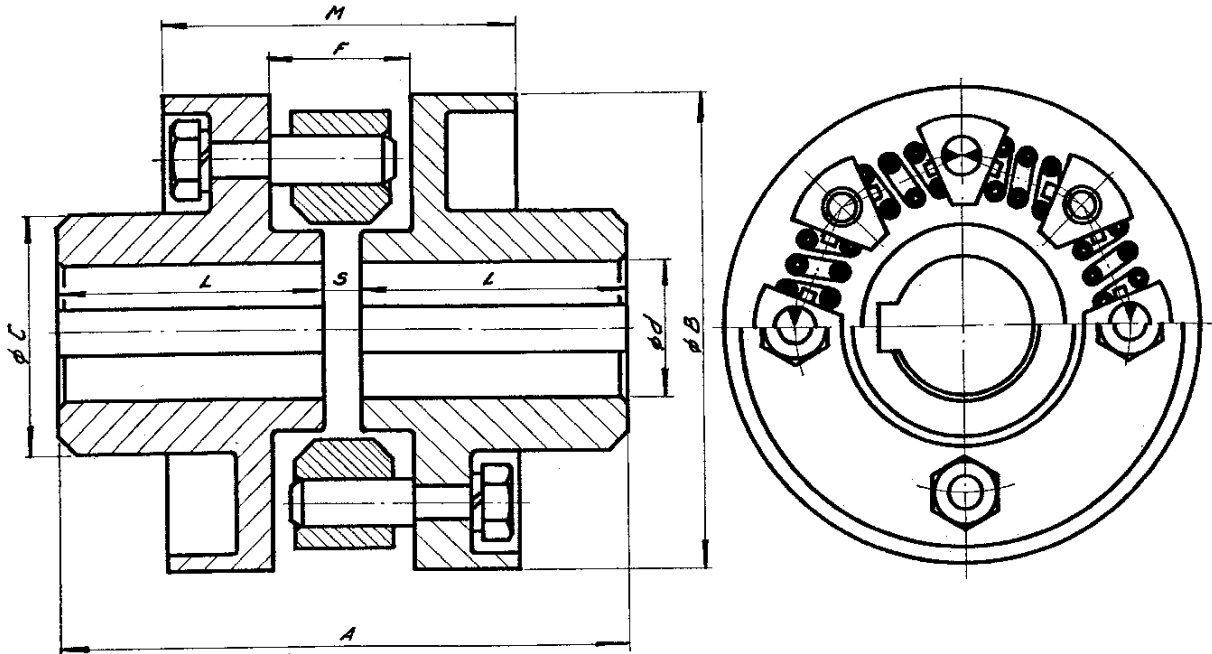

Tipo de acoplamiento	C V a 1r.p.m	Par en mKg	V maxima en r.p.m	A	B	C	Agujero D máximo	F	L	M	S	Peso en Kg
AR8-75	0.1	75	820	145	200	90	50	42	70	106	5	16
AR8-104	0.14	104	790	165	225	100	55	52	80	122	5	22
AR8-165	0.23	165	755	186	250	112	60	56	90	136	6	30
AR8-230	0.32	230	725	206	280	125	70	62	100	148	6	38
AR8-300	0.42	300	710	232	315	140	80	68	112	164	8	50
AR8-458	0.64	458	670	258	355	160	90	76	125	180	8	70
AR8-645	0.9	645	620	288	400	190	100	85	140	201	8	110
AR8-950	1.33	950	585	330	450	200	110	95	160	221	10	145
AR8-1350	1.88	1350	545	370	500	225	125	108	180	248	10	200
AR8-1840	2.57	1840	500	410	560	250	140	120	200	270	10	260
AR8-2580	3.6	2580	450	462	630	280	160	130	225	294	12	370
AR8-3620	5.06	3620	400	512	710	315	180	145	250	329	12	490
AR8-5120	7.15	5120	355	572	800	355	200	160	280	370	12	660
AR8-7740	10.8	7740	325	645	900	400	225	180	315	420	15	970
AR8-10900	15.2	10900	310	725	1000	450	250	200	355	470	15	1420
AR8-14700	20.5	14700	300	815	1125	500	280	225	400	515	15	1950