




“B” SERIES LOADLESS STARTING CENTRIFUGAL AUTOMATIC CLUTCH WITH FLEXIBLE COUPLING TO JOIN TWO ALIGNED SHAFTS.

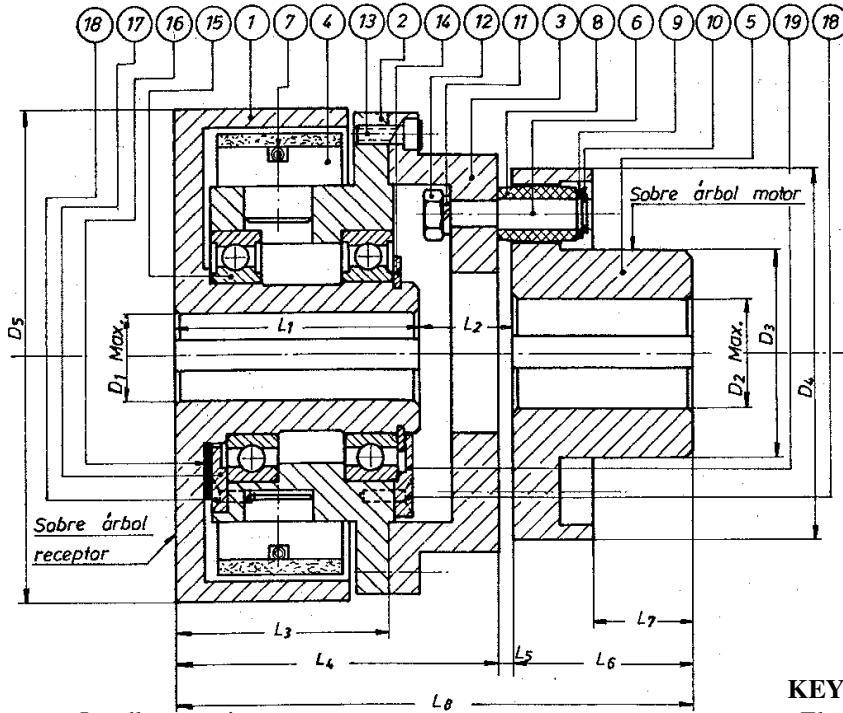

SPARE PARTS IDENTIFICATION	
1:	SLEEVE
2:	CORE
3:	COUPLING FLANGE
4:	MASS
5:	COUPLING PLATE
6:	BOLT
7:	SPRING
8:	RUBBER BUSHING
9:	WASHER
10:	E SEEGER RING
11:	GROWER WASHER
12:	FEMALE SCREW
13:	SCREW
14:	E SEEGER RING
15:	BEARING
16:	WASHER
17:	LID
18:	SCREW
19:	LID

- Loadless starting
- Avoids failures due to overloads or clogging.
- Allow less powerful engines to be used.

- **KEYSEATS ACCORDING TO 6885**
- Electrical accessories are no longer needed.
- For explosion engines, they can be automatically disconnected when idling.

Size	DIAMETERS (mm)					LENGTH (mm)							
	Max D1	Max D2	D3	D4	D5	L1	L2	L3	L4	L5	L6	L7	L8
B-3	28	35	62	112	152	70	30	66	96	4	55	31	155
B-4	38	40	65	125	170	75	31	68	102	4	60	32	166
B-5	42	50	85	160	200	83	35	74	114	4	80	45	198
B-6	50	50	85	160	230	90	35	80	120	4	80	45	204
B-7	65	65	110	200	270	110	51	92	154	7	100	58	261
B-8	80	82	140	250	350	138	65	113	196	7	120	66	323

Size	MAXIMUM POWER (KW) FOR SEVERAL ROTATIVE SPEEDS (RPM)																	
	300	500	750	960	1200	1450	1750	2000	2250	2500	2700	2860	3000	3200	3500	3800		
B-3		0.18	0.55	1.18	2.21	4	7.14	10.7	14.72	19.14	20.6	22.1	22.8	24.3	26.5	29.4		
B-4	0.06	0.29	1	2.1	4	7.36	12.5	19.14	22.8	25	27.2	29.4	30.9	32.3	35.3			
B-5	0.11	0.58	1.99	4.23	8.32	14.7	25.8	29.4	33.12	36.8	39.7	42	44.2					
B-6	0.18	0.88	2.94	6.26	12.36	22.1	38.27	53.7	60.35	67	72.1							
B-7	0.44	2.2	7.73	16.19	30.9	55.2	92	10.5	118.5									
B-8	1.47	7.13	23.55	50.8	98.6	172.9	212	For higher powers ask our technical department										