




**“C” SERIES LOADLESS STARTING AUTOMATIC CENTRIFUGAL CLUTCH WITH FLEXIBLE COUPLING TO DRIVING WHEEL WITH LOAD SHAFT.**

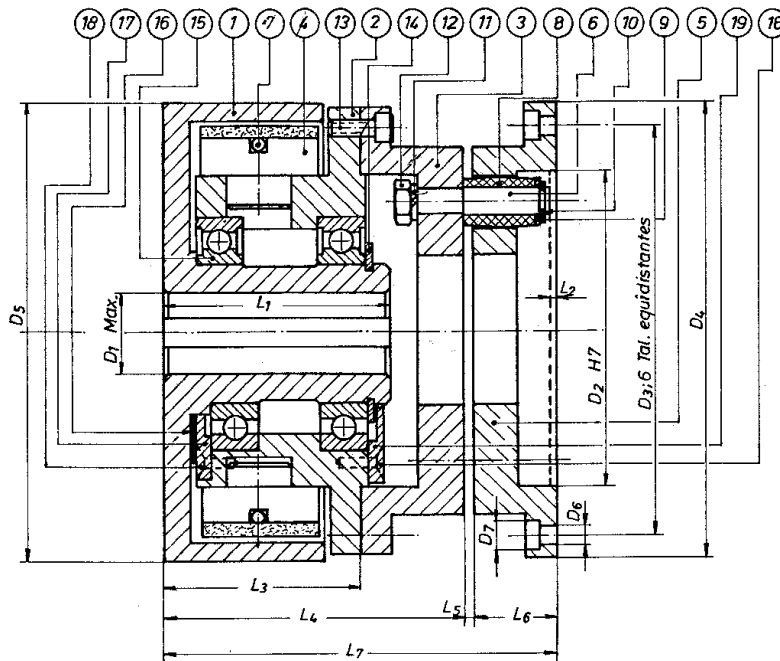

**SPARE PARTS IDENTIFICATION**

- 1: SLEEVE
- 2: CORE
- 3: COUPLING FLANGE
- 4: CENTRIFUGAL MASS
- 5: COUPLING FLANGE
- 6: BOLT
- 7: SPRING
- 8: RUBBER BUSHING
- 9: WASHER
- 10: E SEEGER RING
- 11: GROWER WASHER
- 12: NUT
- 13: SCREW
- 14: E SEEGER RING
- 15: BEARING
- 16: WASHER
- 17: LID
- 18: SCREW
- 19: LID

KEYSEATS ACCORDING TO DIN 6885

L2: Locator fit depth

- Loadless starting
- Avoids failures due to overloads or clogging.
- Allow less powerful engines to be used.
- Electrical accessories are no longer needed.
- For explosion engines, they can be automatically disconnected when idling.

Size	DIAMETERS (mm)							LENGTHS (mm)						
	Max D1	H7 D2	D3	D4	D5	D6	D7	L1	L2	L3	L4	L5	L6	L7
C-3	28	104	135	150	152	6.75	11	70	2	66	96	4	30	130
C-4	38	118	150	165	170	6.75	11	75	2	68	102	4	30	140
C-5	42	149	180	195	200	8.75	14	80	2	71	111	4	40	155
C-6	50	149	180	195	230	8.75	14	90	3	80	120	4	40	164
C-7	65	188	230	248	270	8.75	14	110	6	92	154	7	62	223
C-8	80	235	290	310	350	10.75	17	138	6	113	196	7	83	286

Size	MAXIMUM POWER (KW) FOR SEVERAL ROTATIVE SPEEDS (RPM)															
	300	500	750	960	1200	1450	1750	2000	2250	2500	2700	2860	3000	3200	3500	3800
C-3		0.18	0.55	1.18	2.21	4	7.14	10.7	14.72	19.14	20.6	22.1	22.8	24.3	26.5	29.4
C-4	0.06	0.29	1	2.1	4	7.36	12.5	19.14	22.8	25	27.2	29.4	30.9	32.3	35.3	
C-5	0.11	0.58	1.99	4.23	8.32	14.7	25.8	29.4	33.12	36.8	39.7	42	44.2			
C-6	0.18	0.88	2.94	6.26	12.36	22.1	38.27	53.7	60.35	67	72.1					
C-7	0.44	2.2	7.73	16.19	30.9	55.2	92	10.5	118.5							
C-8	1.47	7.13	23.55	50.8	98.6	172.9	212	For higher powers ask our technical department								